



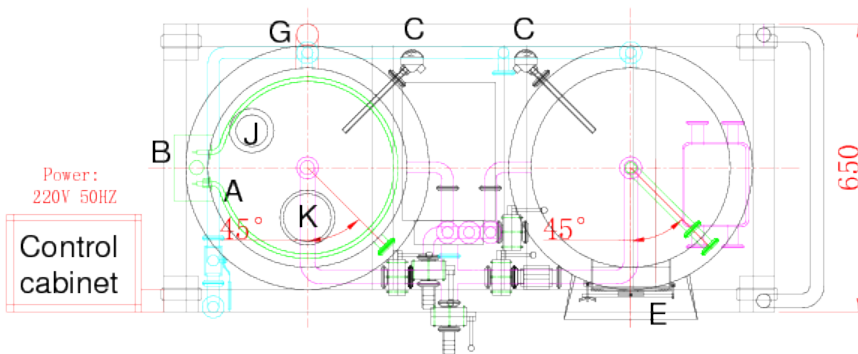

# 60L

Kettle/whirlpool tank Mash/lauter tank

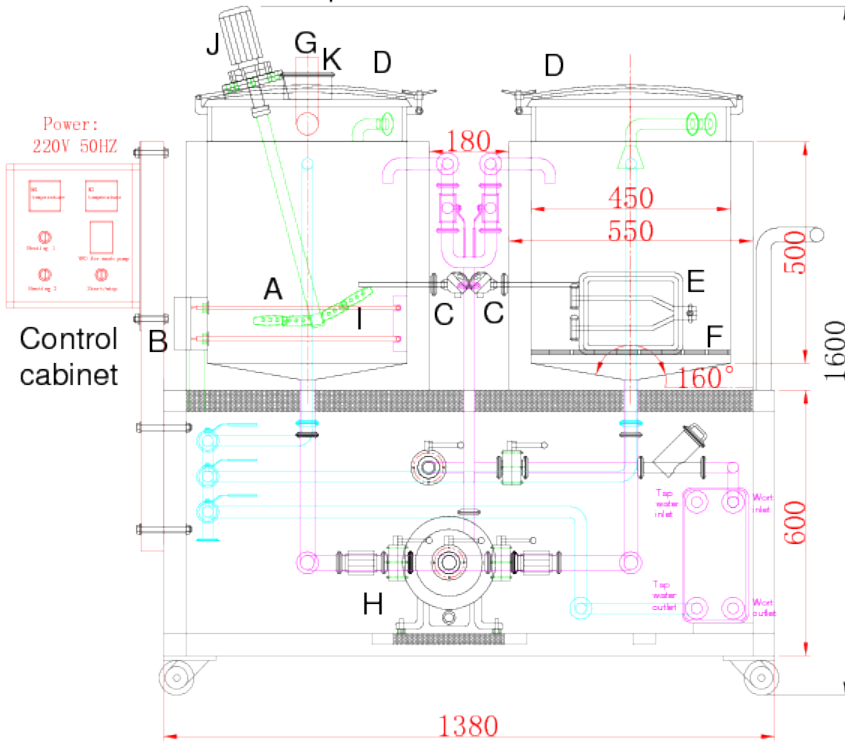

## Technique parameter

	Interior	Exterior
Material	SUS304	SUS304
Storage liquid	Wort	
Working pressure Mpa	Ordinary pressure	
Tank Size mm	550*1600	
Quantity (Nos)	1	
Heating mode	Electric heating	
Insulation material	Polyurethane	
Insulation thickness mm	50	
Outer tank thickness mm	1.5	
Inter tank thickness mm	2.0	
Cone angle	160°	
Effective volume L	60	
Total volume L	80	

## Welding process requirement

		Standard
Welding wire material	316-SUS	GB/T983, YB/T5091/2
Welding requirements	Both sides welding	JB/T4709-2000

## Specification

K	Port	Clamp	108mm
J	Motor		
I	Agitator		
H	Wort pump		
G	Steam outlet		50mm
F	Sieve plate		
E	Vinasse door	Quick-open	235*180mm
D	Manhole door	Quick-open	450mm
C	Temperature probe	Clamp	10mm
B	Junction box		
A	Heating bar		
Icon	Name	Connecting Style	Size

60L Brewhouse



Shandong Shendong Equipment Technology Co., LTD

	签名	时间
设计		
校对		
审核		
批准		

Assembly Diagram

重量 阶段标记

日期 NO.2017-05-15